


TECHNICAL DATA SHEET

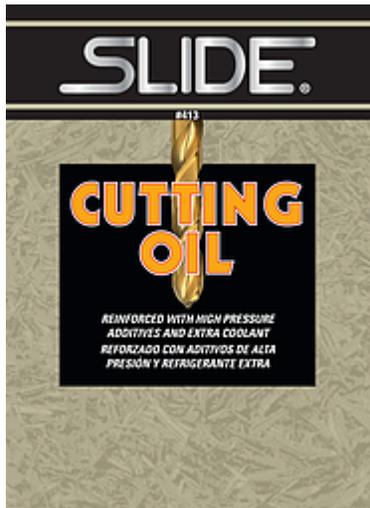

Cutting Oil Bulk/Liquid

41301B, 41305B, 41355B

Product Description

Formulated with high-pressure additives, Slide's Cutting Oil aids with heat dissipation and provides lubrication during drilling, cutting or tapping metal surfaces. Our unique compounded oil clings to metal and follows the cutting tool down through the metal surface. It is designed to maximize the life of cutting tools / drilling equipment, improving machine finish, and lubricating the tools to prevent pitting and metal seizures.

Applications

Cutting Oil

Shelf Life

Three years from Date of Manufacture (as found on the bottom of each can and shipping box)

Unit Package Description

1, 5 and 55-gallon containers

Generic Description

Cutting Oil for Metal

Approx. Net Weight Fill per Gal.

9 pounds

Net Weight Fill

1 - 55 gallons

Appearance

Brownish-Tint Liquid

Odor

Petroleum like

Flash Point F

315 degrees

Flash Point C

157.2

Base Type

Petroleum

Evaporation Rate

Slow

HMIS Rating

2, 2, 0, G

DOT Proper Shipping Name

Not Regulated

VOC % (Federal)

22

VOC g/L (Federal)

237.26

VOC lbs./Gal (Federal)

1.98

Removal

Remove with organic or hydrocarbon solvents

Units Per Case

1

Case Weight (lbs)

Various

Specific Gravity

0.9

