


TECHNICAL DATA SHEET

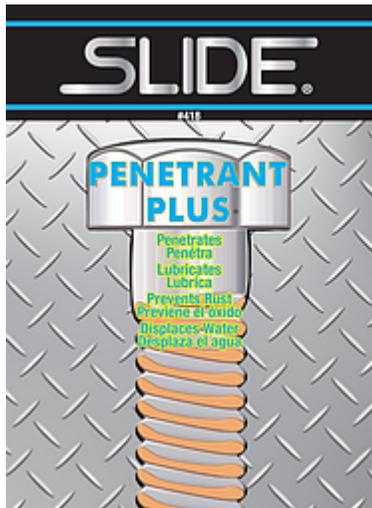

Penetrant Plus Aerosol

41812M

Product Description

Made with non-silicone penetrating oils that are fortified with PTFE additives to increase the lubrication and flow of the product once its applied. It helps free rusted or frozen metal components due to its highly fluid properties that creep into the molecular level of metal. Displaces moisture and leaves behind a protective film to keep parts lubricated and protected from corrosion. Manufactured to be compliant with the strictest California VOC limits.

Applications

Penetrating Lubricant

Shelf Life

Three years from Date of Manufacture (as found on the bottom of each can and shipping box)

Unit Package Description

16 ounce aerosol

Generic Description

Penetrating Oil

Net Weight Fill

12 net ounces

UPC Code

858799000189

Appearance

Brown-tint Liquid

Odor

Petroleum like

Flash Point F

Not Applicable

Flash Point C

Not Applicable

Base Type

Petroleum Oil with PTFE

Evaporation Rate

Slow

HMIS Rating

1, 3, 0, B

DOT Proper Shipping Name

UN 1950, Aerosols, Flammable, 2.1, Limited Quantity

VOC % (Federal)

21.19

VOC g/L (Federal)

152.53

VOC lbs./Gal (Federal)

1.27

Removal

Remove with organic or hydrocarbon solvents

Units Per Case

12

Case Weight (lbs)

13

Working Temperature F

32 to 338 degrees

Working Temperature C

0 to 170 degrees

Propellant

Propane

NFPA Aerosol Flammability Level

3